




SHARP
ENGINEERS
NORTH AMERICA

Quality

That Inspires Trust

SEG-X7
GEARLESS MACHINE


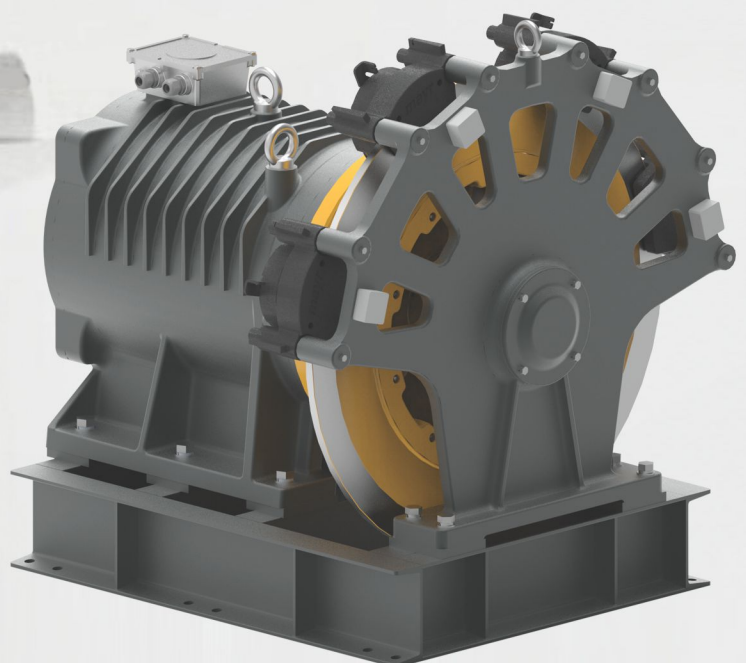




SPECIFICATION


Roping		1:1
Max. Sheave shaft Load	lbs (Kg)	26700 (12110)
Max. Elevator Capacity 100%	lbs (Kg)	3500 (1588)
Max. Elevator Speed	fpm (m/sec)	500 (2.54)
Sheave Diameter / Rope Size / No. of Ropes	Inch	Ø25" X 5/8" X 6 Ropes
Max. Rated Power	Kw (HP)	26.7 (35.8)
Max. Rated Torque	ft-lbs (Nm)	2463 (3339)
Max. Rated Torque (125%)	ft-lbs (Nm)	3079 (4174)
Rated Voltage	V	380
Brake Torque at Sheave (125%)	ft-lbs (Nm)	3128 (4241)
Emergency Brake Torque	ft-lbs (Nm)	3128 (4241)
Machine Weight	lbs (Kg)	4200 (1905)*

* Weight of machine is varies according to selection of Sheave, Motor & Drive system.

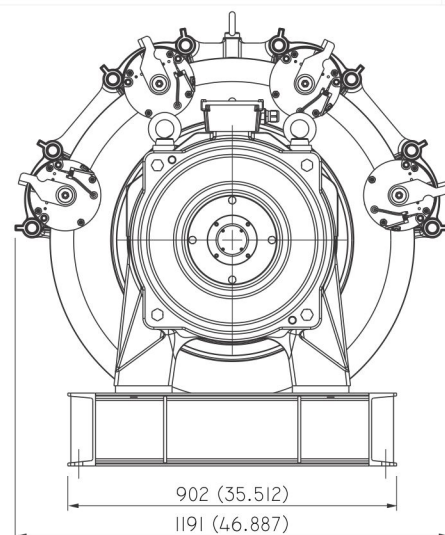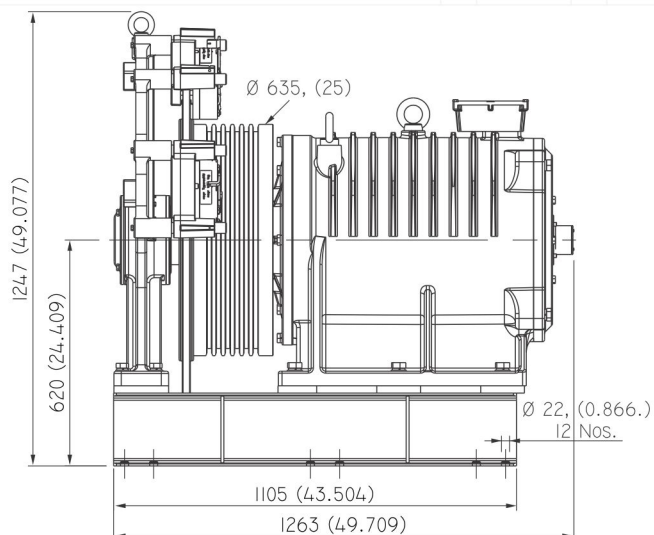






Long Wrap Machine 270 Degree Wrap Angle (2500 LBS)

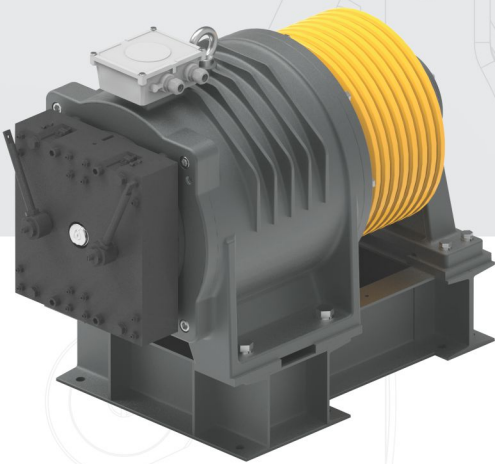

SPECIFICATION		
Roping		1:1
Max. Sheave shaft Load	lbs (Kg)	26700 (12110)
Max. Elevator Capacity 100%	lbs (Kg)	2500 (1134)
Max. Elevator Speed	fpm (m/sec)	500 (2.54)
Sheave Diameter / Rope Size / No. of Ropes	Inch	Ø20" X 1/2" X 7 Ropes
Max. Rated Power	Kw (HP)	19.8 (26.6)
Max. Rated Torque	ft-lbs (Nm)	1463 (1984)
Max. Rated Torque (125%)	ft-lbs (Nm)	1829 (2480)
Rated Voltage	V	380
Brake Torque at Sheave (125%)	ft-lbs (Nm)	1829 (2480)
Machine Weight	lbs (Kg)	2744 (1245)*


* Weight of machine is varies according to selection of Sheave, Motor & Drive system.

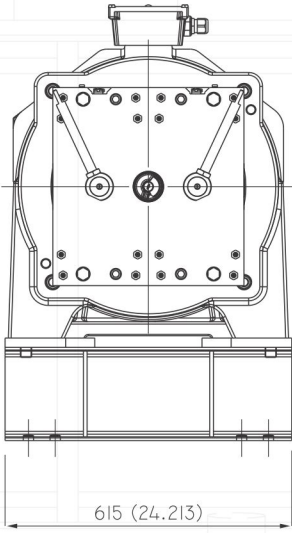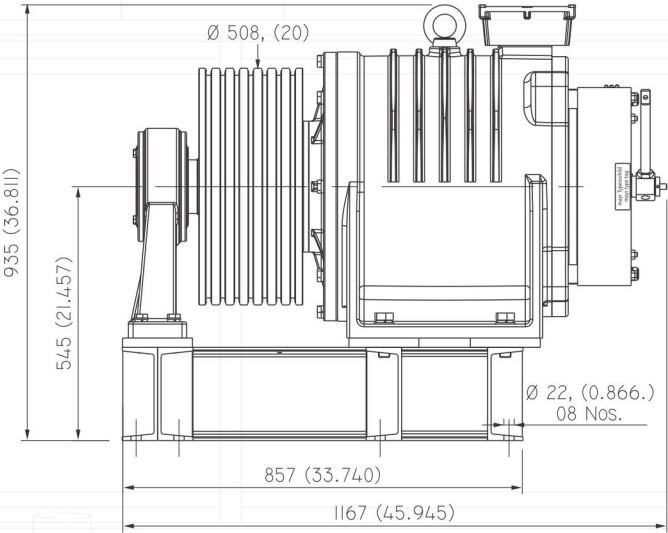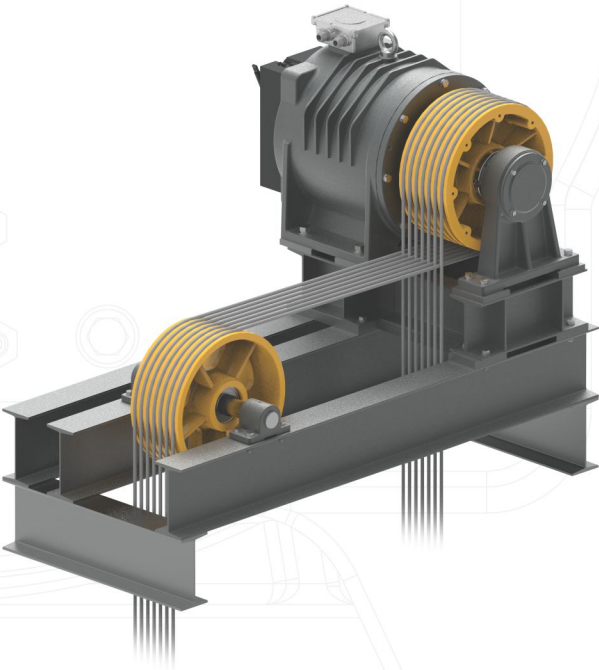





Long Wrap Machine

270 Degree Wrap Angle (3500 LBS)

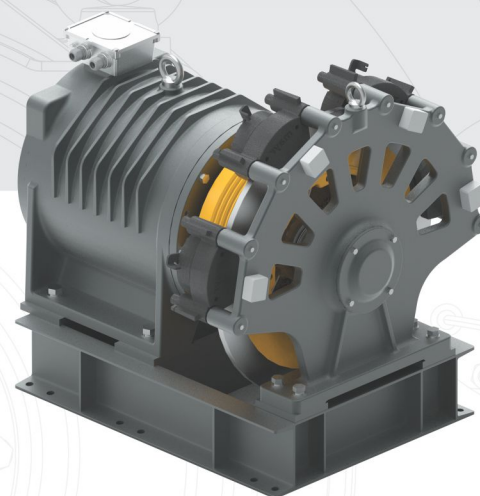

SPECIFICATION		
Roping		1:1
Max. Sheave Shaft Load	lbs (Kg)	26700 (12110)
Max. Elevator Capacity 100%	lbs (Kg)	3500 (1588)
Max. Elevator Speed	fpm (m/sec)	500 (2.54)
Sheave Diameter / Rope Size/No. of Ropes	Inch	Ø20" X 1/2" X 7 Ropes
Max. Rated Power	Kw (HP)	26.7 (35.8)
Max. Rated Torque	ft-lbs (Nm)	1970 (2672)
Max. Rated Torque (125%)	ft-lbs (Nm)	2463 (3340)
Rated Voltage	V	380
Brake Torque at Sheave (125%)	ft-lbs (Nm)	2485 (3369)
Emergency Brake Torque	ft-lbs (Nm)	2485 (3369)
Machine Weight	lbs (Kg)	



* Weight of machine is varies according to selection of Sheave, Motor & Drive system.

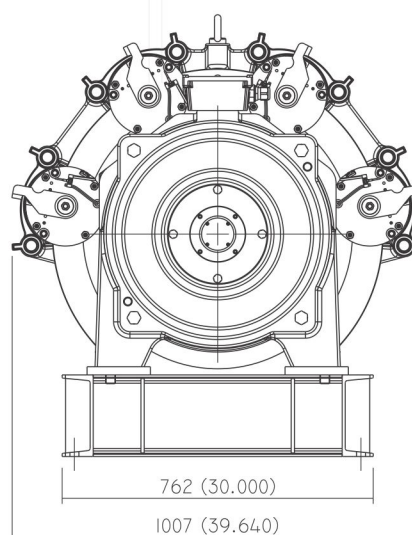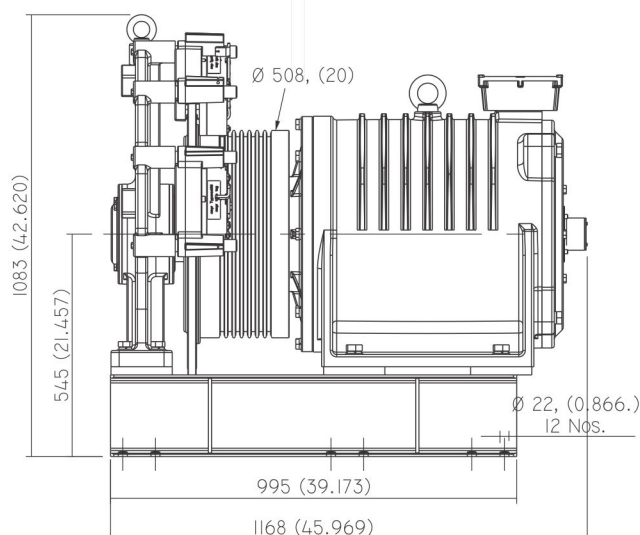



MRL 180 Degree Wrap



MRL 180 Degree Wrap

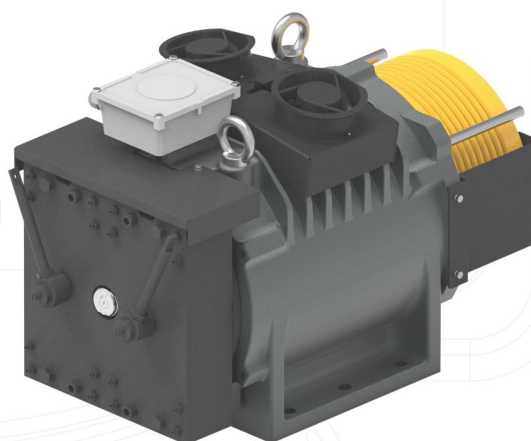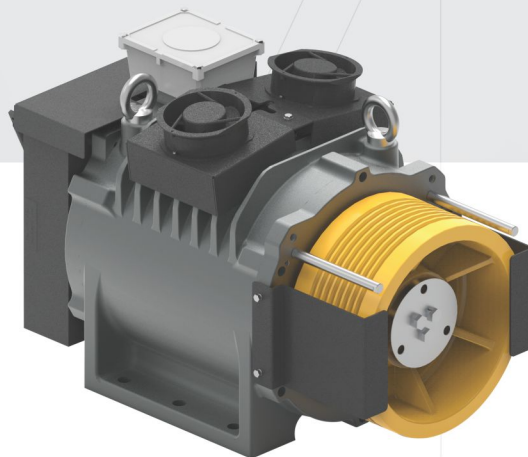

SPECIFICATION

Roping		2:1
Max. Sheave shaft Load	lbs (Kg)	21500 (9752)
Max. Elevator Capacity 100%	lbs (Kg)	4500 (2041)
Max. Elevator Speed	fpm (m/sec)	500 (2.54)
Sheave Diameter / Rope Size / No. of Ropes	mm	Ø400 X Ø10mm X 8 Ropes
Max. Rated Power	Kw (HP)	34.6 (46.4)
Max. Rated Torque	ft-lbs (Nm)	1003 (1360)
Max. Rated Torque (125%)	ft-lbs (Nm)	1254 (1700)
Rated Voltage	V	380
Brake Torque at Sheave (125%)	ft-lbs (Nm)	1264 (1713)
Emergency Brake Torque	ft-lbs (Nm)	1264 (1713)
Machine Weight	lbs (Kg)	1770 (803)*

* Weight of machine is varies according to selection of Sheave, Motor & Drive system.

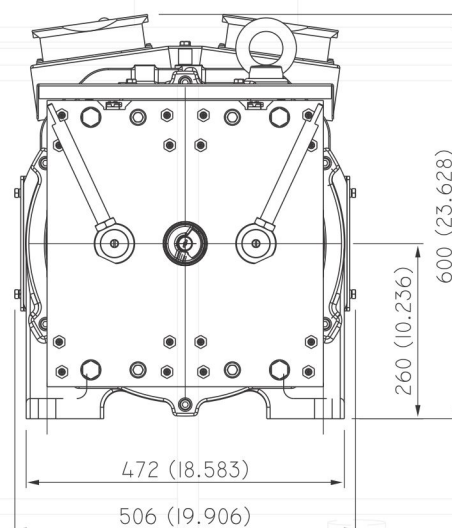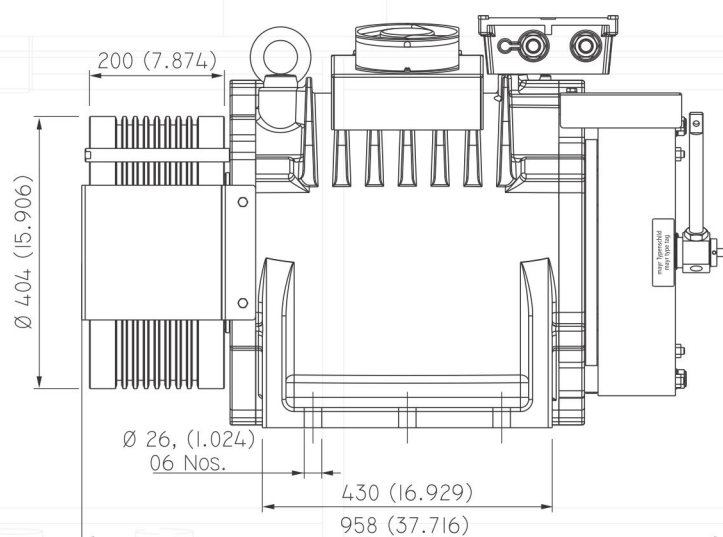



SHARP
ENGINEERS
NORTH AMERICA



25673 N Hillview Court,
Mundelein, Illinois-60060, **USA**



47-52 37th Street in Long Island City,
New York 11101, **USA**



+1 847 867 2070, +1 848 207 8860



sales@sharpengineersna.com



www.sharpengineersna.com